


AMP CON

FIT W5L/FIT W5T All-weather Fashion Speaker

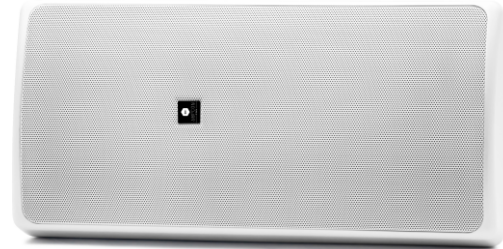

Features:

FIT W series are compact waterproof fashion speakers. The use of international advanced mold, thickened high-strength ABS cabinet, and cleverly designed mounting bracket can respond to any installation requirements. The dustproof and waterproof performance of the speaker is as high as IP66 grade, and it has been subjected to strict waterproof test when leaving the factory. It is widely used in various all-weather environments in pursuit of sound quality, such as commercial pedestrian street, bar street, villa, swimming pool, golf course, sports ground, etc. It also has extraordinary performance in indoor environments such as meeting room, banquet hall, and multi-function hall.

With 100V constant voltage or 8Ω version options. This series of speakers provide a wider range of versatile uses, whether professional audio applications or public broadcasting can be competent.

Optional black and white colors or various spray colors that can be customized at the factory can be adapted to more places. The user-friendly design of the mounting bracket can make the voluminous installation work accurate and fast, save the cost and time of installation, can adjust the angle of the speaker at will, and accurately control the sound field distribution.

Constant voltage version: FIT W5T

Fixed impedance version: FIT W5

- All-weather speaker with a wide range of applications.
- Dustproof and waterproof grade conforms to IEC529 IP66 standard.
- Stunning and extraordinary sound quality.
- All-weather speaker designed for the professional audio and commercial audio markets.
- Excellent 5", 8" coaxial unit.
- The treble is transparent, bright, soft and not irritating.
- The bass is surging, powerful and thick.
- With 100V constant voltage or 8Ω version options.
- ABS enclosure and aluminum mesh, optional black and white.
- Specifically designed gravity cabinet to help improve directionality and versatile installation.
- The hidden mounting bracket provides quick and flexible installation.

Model	FIT W5T	FIT W5L
Rated power	60W@100V	90W@8Ω
Max power	90W@100V	135W@8Ω
SPL(1W / 1m)	93dB SPL (125 Hz-12.5 kHz @1/3 octave frequency band) 94dB SPL (250 Hz-4 kHz)	
Max SPL(Rated / 1m)	112 dB SPL@110V	115 dB SPL@8Ω
Frequency response (-10dB)	80Hz~20kHz	
Diffusion Angle (4kHz / 1kHz)	115° cone (+46°/-46°, 500Hz to 6kHz)	
Power selection method	Phoenix terminal interface	
Material	Enclosure: ABS; Mesh cover: metal	
Color	FIT W5L B: black; FIT W5L W: white	
Operating temperature/humidity	-30°C ~ 60°C; <95%	
Dustproof and waterproof grade	IEC529 IP66	
Speaker unit	5.25" coaxial unit	
Dimensions	160 (W) x 328(H) x 192(D)	
Weight (1 pc)	5.7kg	6kg
Installation	Hidden mounting bracket	
Gross weight	13.4kg, 2 pcs	14kg, 2 pcs