


FLEX T26 2-way professional speaker



Features:

- System type: 3 unit 2-way full range frequency loudspeaker
- Rated power: 300W
- Max power: 600W
- Peak power: 1200W
- Nominal impedance: $8\ \Omega$
- Recommended power amplifier output rating: 400W—600W@ $8\ \Omega$
- Nominal sensitivity (1W@1m) : 97dB
- Max SPL (Pmax@1m) : 122dB@300w(125dB@600w)
- Frequency response (-10dB) : 90Hz—20KHz
- Nominal coverage pattern (-6dB) : $90^\circ\text{H} \times 90^\circ\text{V}$
- Speaker component: LF driver 6.5" (165mm diameter 35mm voice coil) $\times 2$
HF driver 1" (25 mm voice coil) $\times 1$
- Crossover modes: Passive
- Connector: Speakon NL4 $\times 2$ (PIN1+/2+POS. PIN1-/2-NEG.)
- Enclosure: 12mm (0.47") High quality birch plywood
- Color: Default is black, other colors can be customized
- Dimensions: W190mm x D210mm x H510mm
- Weight(each) : 8.9KGS
- Shipping weight: 19.3KGS, 2pcs
- Reference applications: Restaurants, shops, conference rooms, churches, auditoriums

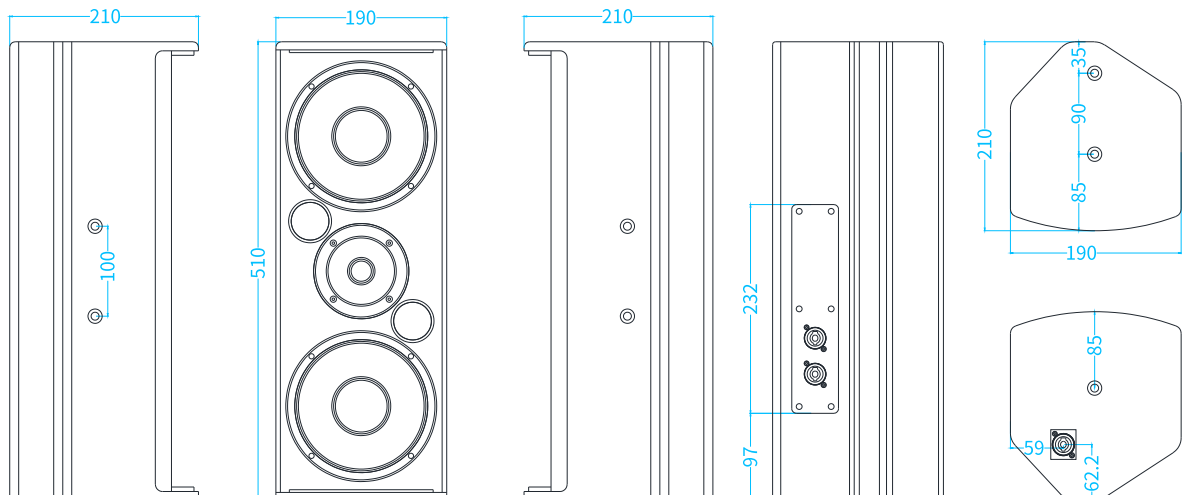


FLEX T6 2-way professional speaker



Features:

- System type: 2 unit 2-way full range frequency loudspeaker
- Rated power: 100W
- Max power: 200W
- Peak power: 400W
- Nominal impedance: 8 Ω
- Recommended power amplifier output rating: 200W—300W@8 Ω
- Nominal sensitivity (1W@1m) : 96dB
- Max SPL (Pmax@1m) : 116dB@100w(119dB@200w)
- Frequency response (-10dB) : 80Hz—20KHz
- Nominal coverage pattern (-6dB) : 90°H × 90°V
- Speaker component: LF driver 6.5" (165mm diameter 35mm voice coil) × 1 (subwoofer)
HF driver 1" (25 mm voice coil) × 1 (tweezer)
- Crossover modes: Passive
- Connector: Speakon NL4 × 1 (PIN1+/2+POS. PIN1-/2-NEG.)
- Enclosure: 12mm (0.47") High quality birch plywood
- Dimensions: W190mm x D210mm x H310mm
- Color: Default is black, other colors can be customized
- Weight (each) : 5.55KGS
- Shipping Weight: 12.3KGS, 2pcs,
- Reference applications: Restaurants, shops, conference rooms, churches, auditoriums

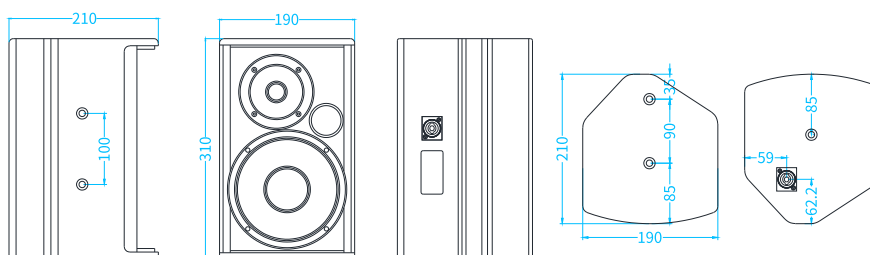

FLEX T8 2-way professional speaker



Features:

- System type: 2 unit 2-way full range frequency loudspeaker
- Rated power: 300W
- Max power: 600W
- Peak power: 1200W
- Nominal impedance: 8 Ω
- Recommended power amplifier output rating: 400W—600W@8 Ω
- Nominal sensitivity (1W@1m) : 97dB
- Max SPL (Pmax@1m) : 122dB@300w (125dB@600w)
- Frequency response (-10dB) : 80Hz—20KHz
- Nominal coverage pattern (-6dB) : 100°H × 60°V
- Speaker component: LF driver 8" (200mm diameter 50mm voice coil) × 1
HF driver 1.3" (34 mm voice coil) × 1
- Crossover modes: Passive
- Connector: Speakon NL4 × 2 (PIN1+/2+POS. PIN1-/2-NEG.)
- Enclosure: 15mm (0.6") High quality birch plywood
- Color: Default is black, other colors can be customized
- Dimensions: W258mm x D249mm x H428mm
- Weight(each) : 10.35KGS
- Shipping weight: 11.60KGS
- Reference applications: Restaurants, shops, conference rooms, churches, auditoriums, Small performance

